



- Shallow mounting depth 1.73"
- Integral mounting hardware
- Wide range of color and finish options
- Available with TUF-R A+C USB




Product Dimensions:

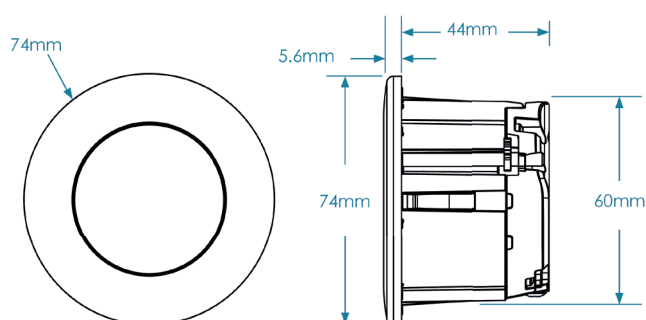

Cutout Dimensions:

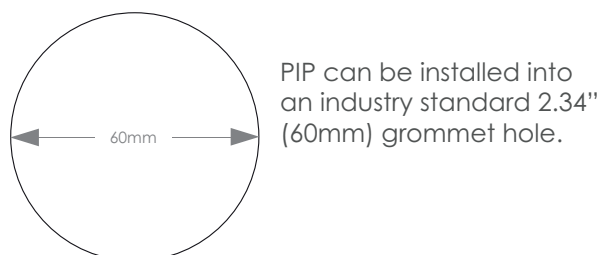


Mounting Options:

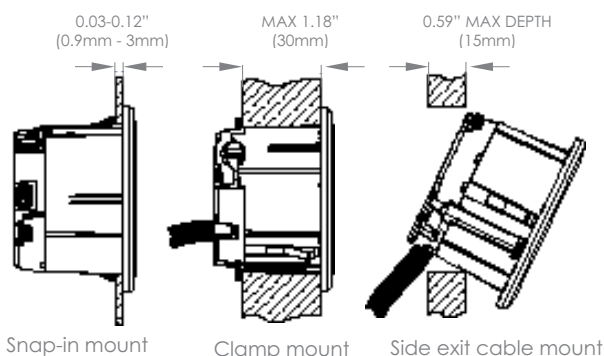

- Snap-in mount for surfaces 0.03-0.12" (0.9mm - 3mm) thick
- Clamp mount for surfaces 0.03-1.18" (0.9mm - 30mm) thick

Common Modular Components:

*See website for more

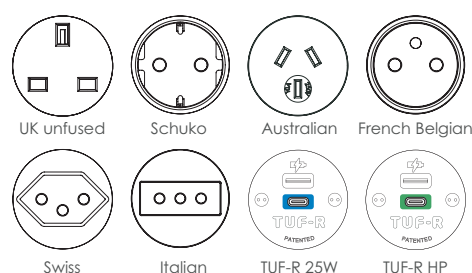

Colors: Black or Grey fascia as standard. Other options available for UK socket and TUF on request.

Range of decorative bezel options, inc. 11 standard paint colours, stainless steel and chrome or request you own RAL paint colour Subject to minimum order quantities.

Wiring (power): All OE Railways Approved products are supplied with Harting Han 1A connectors or to open ended cables and compliant to EN45545.

Certifications: PIP is certified railways approved to the relevant standards: GM/RT 2130 Issue 5.1
EN 50153: 2014+A2-2020, EN 45545-2:2020, EN 50121-3-2:2016+A1, EN 50343:2014+A1:2017, EN 50155:2021(Annex G), EN 61373:2010.