

qf15 tuf hp


DATASHEET

- 65W A+C USB fast charge
- Compact Flush design
- LED status indicator
- Unique reversible USB-A connector





USB Charging Outlets	1 x Type C (Reversible) 1 x Type A (Reversible)
Power In connector	Male GST08 DC connector
Rated Total Output Power	72W MAX
Output Voltages & Currents	TYPE C: MAX 60W 20V/3A, 15V/3A, 9V/3A, 5V/3A (PD3.0) 3.3 - 11.0V / 3.2A (PD PPS Mode) QC 2/3.0 5V/3A, 9V/2A, 12V/1.5A TYPE A: MAX 12W 5V / 2.4A IDR BC1.2, Apple 12W Mode Samsung Fast Charge
Input Voltage	24 - 30V DC
USB Connector Min. Insertions	Type A, 10,000 Type C 10,000
Over Current Protection	Yes. Digital control at 3.3A. Auto reset with LED flash.
Short Circuit Protection	Yes. Digital control at 3.3A. Auto reset.
Over Temperature Protection	Auto Power Reduction to PD 45W Mode. 20V/2.25A, 15V/3A, 9V/3A, 5V/3A
Rated Operating Temperature	32°F TO 77°F (0° TO 25°C)
User Replaceable USB module	Yes
Certifications – Safety	IEC 62368-1 : 2014
Certifications –EMC	EN61204 : 2018 EN 50121-3-2 (railway) FCC part 15 (B)
Certifications ROHS	EU 2015/863

Unit Dimensions

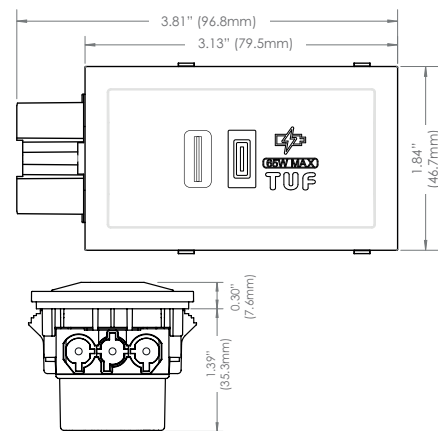

Cutout Dimensions

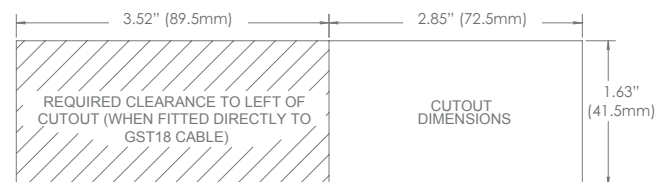

Colors: Black or White

Wiring (power): All OE Railways Approved products are supplied with Harting Han 1A connectors or to open ended cables and compliant to EN45545.