

single gang frame


DATASHEET



- compact modular fascia moulded from Makrolon 6485



Dimensions

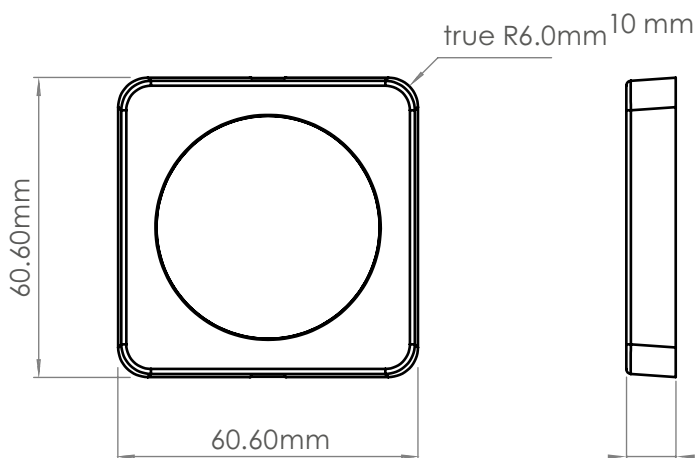

USB Specifications

USB Charging Outlets	1 x Type A Female (Reversible) 1 x Type C Female (Reversible)
Charging Current	Type-C: 5.0V/3.0A (15.0W); 9.0V/2.2A (19.8W); 15.0V/1.7A (25.5W); 20.0V/1.2A (24.0W) Type-A: 5.0V/3.0A (15.0W); 9.0V/2.0A (18.0W); 12.0V/1.5A (18.0W) Combined: 5.0V/4.0A (20.0W)
Rated Total Output Power	25W
AC Voltage Range	100-240VAC at 50/60Hz
AC Input Current (Full Load)	Maximum 0.6A
Efficiency	87.1%
Environment	0-25°C
Standby Power	0.06W

Certifications: TUF is certified railways approved to the relevant standards: GM/RT 2130 Issue 5.1
EN 50153: 2014+A2-2020, EN 45545-2:2020, EN 50121-3-2:2016+A1, EN 50343:2014+A1:2017, EN 50155:2021(Annex G), EN 61373:2010.

Common Modular Components:

*See website for full list of modular components

